

RECORD OF LAND CORNER MONUMENTATION


CORNER: N $\frac{1}{4}$ Cor. Sec. 26, Twp. 14S., R.31E., W.M.

ORIGINAL SURVEY BY: Bamford Robb

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

SUBSEQUENT SURVEY: Peter A. Peterson 1978



ORIGINAL G.L.O. DESCRIPTION: Set stone 16x8x6 in mound of stone for $\frac{1}{4}$ sec. cor.

1978 BLM RESURVEY BY PETER A. PETERSON, CADASTRAL SURVEYOR UNDER SUPPLEMENTAL AND SPECIAL INSTRUCTIONS DATED 6/12/1978 INCLUDED IN GROUP NO. 947: Point for the $\frac{1}{4}$ sec. cor. of secs. 23 and 26, at proportionate distance; there is no remaining evidence of the original corner. Set iron post, 28 ins. long, 2 $\frac{1}{2}$ ins. diam., 22 ins. in the ground, in a mound of stone, 2 $\frac{1}{2}$ ft. base, to top, with brass cap mkd. [see cap below]. From which: A pine, 10 ins. diam., bears N.72 $\frac{1}{2}$ °E., 73 lks. dist., mkd. $\frac{1}{4}$ S23 BT. A pine, 6 ins. diam., bears S.72°W., 68 lks. dist., mkd. $\frac{1}{4}$ S23 BT.

EVIDENCE FOUND: Found 2 $\frac{1}{2}$ " iron pipe with a 3" BLM brass cap projecting 6" above ground in a scattered mound of stone. A pine BT bears S.71°W.—BT scorched during the 2015 Canyon Creek Complex fire, and is dead. A pine bears N.71°E.—BT scorched during the fire, and is dead.

DESCRIPTION OF MONUMENT AND ACCESSORIES SET:

Set orange fiberglass witness post with attached location tag next to mound of stone. Rebuilt mound of stone. Posted new BT tags with 1978 record bearings and distances on BT's.

FROM WHICH, I set the following reference points:


A 5/8" x 30" iron pin, bears N.62°54'E., 8.48 ft., with attached Grant County Surveyor Alum. Cap mkd. RP1 2015.

A 5/8" x 30" iron pin, bears S.44°54'E., 7.05 ft., with attached Grant County Surveyor Alum. Cap mkd. RP2 2015.

A 5/8" x 30" iron pin, bears S.63°22'W., 14.28 ft., with attached Grant County Surveyor Alum. Cap mkd. RP3 2015.

A 5/8" x 30" iron pin, bears N.60°08'W., 15.96 ft., with attached Grant County Surveyor Alum. Cap mkd. RP4 2015.

Used RTK GPS to measure RP1–RP4. Bearings to RP's are based on Geodetic North from a GPS observation taken at the corner point.

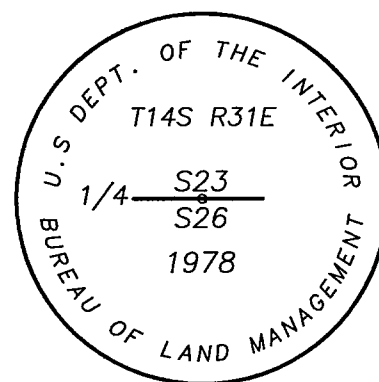

STATE PLANE COORDINATES (3601 ORN)

Reference Datum: NAD83(2011) from an OPUS Solution

Northing: 247,090.3 ft.
Easting: 8,604,578.0 ft.
Ellip. Ht: 4,106.1 ft.

RESTORATION BY:

Michael C. Springer, PLS
Grant County Surveyor
Marcus Teague, Technician
217 N. Canyon Blvd.
John Day, OR, 97845

Surveyed November 18, 2015

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

DEC 8 2015

BY:



EXPIRES: 6/30/2016