

RECORD OF LAND CORNER MONUMENTATION


CORNER: NW Cor. Sec. 9, Twp. 14S., R.33E., W.M.

ORIGINAL SURVEY BY: Bamford Robb

CONTRACT NUMBER: 357

CONTRACT DATE: July 2, 1880

SUBSEQUENT SURVEY: Jack L. Watson 2003



ORIGINAL G.L.O. DESCRIPTION: Set basalt stone 12X8X6 in mound of stone for cor. to secs. 4-5-8 & 9 from which: a pine 36 in. dia. bears N.35°E., 73 lks. dist. A pine 30 in. dia. bears S.45°W., 91 lks. dist. A pine 30 in. dia. bears S.80°E., 155 lks. dist.

2003 SURVEY BY JACK L. WATSON, PLS DATED 7/24/2003.

No evidence of the original corner was found. See Record Map of Survey No. 1672. At the point determined by double proportionate measure, I set a 2½"x30" aluminum pipe with attached 3½" aluminum cap, 34 inches in the ground. This corner falls in the road. The cap is stamped as shown in the diagram. From which:

A 5/8"x 24" iron pin bears N.34°E., 35.07 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x 24" iron pin bears S.72°E., 29.47 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x24" iron pin bears S.51°W., 37.27 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x24" iron pin bears N.48°W., 33.80 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

I used a steel tape and magnetic compass, with 18°E declination.

EVIDENCE FOUND: Found 3½" aluminum cap and 2½" aluminum pipe 14" below road surface. We found the following RP's: a 5/8" iron pin bears N.34°25'E., 35.07 ft., with a red plastic cap marked Cornerstone Surveying Inc., a 5/8" iron pin bears S.71°33'E., 29.53 ft., with a red plastic cap marked Cornerstone Surveying Inc., a 5/8" iron pin bears S.50°31'W., 37.26 ft., with a red plastic cap marked Cornerstone Surveying Inc., a 5/8" iron pin bears N.48°13'W., 33.76 ft., with no cap. Corner is situated in road alongside snowplow turnaround and is North of fence and cattleguard running E-W. SW RP is approximately 1' W of wooden fence running N-S.

DESCRIPTION OF MONUMENT AND ACCESSORIES SET:


STATE PLANE COORDINATES (3601 ORN)

Reference Datum: NAD83(2011) from an OPUS Solution

Northing: 264,115.5 ft.

Easting: 8,654,562.2 ft.

Ellip. Ht: 4,152.5 ft.

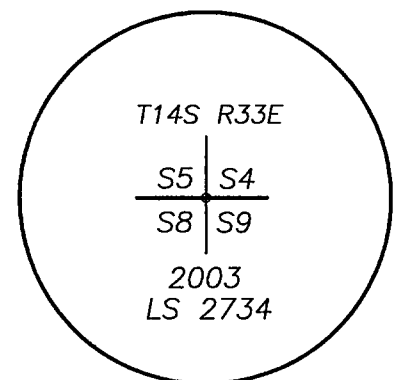


RESTORATION BY:

Michael C. Springer, PLS
Grant County Surveyor
Marcus Teague, Technician
217 N. Canyon Blvd.
John Day, OR, 97845

Surveyed November 30, 2015

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

DEC 8 2015

BY: 



EXPIRES: 6/30/2016