

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
None

*

DIAGRAM
T17S R29E
W1/16
C-----C
S30

Description of corner evidence found:
None


Description of monument and accessories I establish to perpetuate the original location of this corner:

Set a 2½x28" aluminum monument 22" in the ground in a mound of stone.	T17S R29E W1/16 C-----C S30
I establish new bearing trees:	PLS1918 1988
A 7" Juniper bears N33°E, 50.9 ft, scribed CW1/16S30BT.	
A 14" Juniper bears S64°W, 63.1 ft, scribed CW1/16S30BT.	

New BTs have ¾" brass washers marked PLS1918 attached to the BT blaze, faces and bands painted with red tree marking paint, and BT tags and Attention or Land Survey Monument signs. A steel fence post with Attention or Land Survey Monument sign is driven approximately 3-5 feet from the corner.

Smokey Cadastral Survey, Cont. No. 53-04H1-7-4011
Field Book: 4-4
Work accomplished: 7/2/88
Witnesses: Tyler Parsons
 Douglas Parsons
Job No.: 87226

PARSONS SURVEYING
1915 S.E. Stone Street
Corvallis, OR 97333
(503) 752-7515

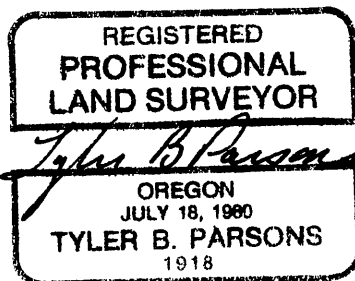

Office of COUNTY SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 4 day of Nov, 1988

Robert L. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)