


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established.

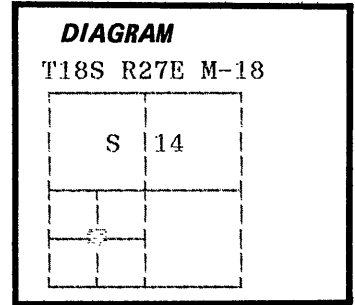

No record of subsequent monumentation found in Grant County survey records.

Description of corner evidence found:

Corner not previously established.

See map of survey 1149 dated June, 1990.

Description of monument and accessories I established to perpetuate the

original location of this corner: At position determined by survey, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 12 inches in the ground, from which:

New BTs:

A 12 inch diameter Ponderosa Pine bears S 1°E, 8.25 feet, marked SW 1/16 S 14 BT.
A 17 inch diameter Ponderosa Pine bears N27°W, 34.48 feet, marked X BT.



Raised mound of stone 4' base to top of cap.

Set a steel fencepost approximately 5 feet North with land survey monument sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on June 7, 1990.

Witnesses:

Jeff Petersen

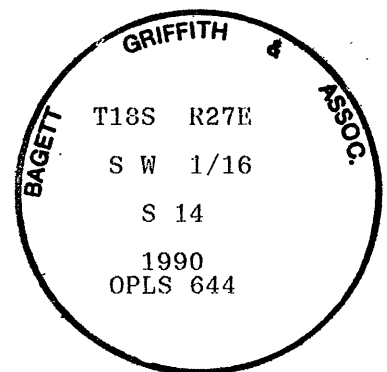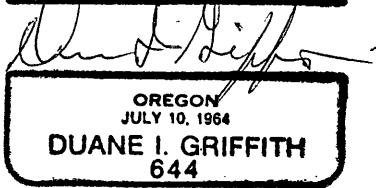

I used a steel tape and magnetic compass in the establishment of new accessories. I used 18° East magnetic declination and the distances are to a 50d spike driven into the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 17 day of July, 1990
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)