


CORNER RESTORATION

CORNER: E1/4 Cor. Sec. 8 Twp. 18 S. Range 28 E., W.M.

ORIGINAL SURVEY BY: Henry W. Cooke

CONTRACT NUMBER: 494

CONTRACT DATE: January 16, 1884



Subsequent surveys:

- Nathan C. Erickson, Cadastral Surveyor, under special instructions approved June 3, 2010, Group No. 2334.
Completed June 30, 2010

ORIGINAL DESCRIPTION: *Set a post 3 ft. long 3 ins square with marked stone 12 ins in ground for 1/4 Sec Cor Marked 1/4 S on W. face dug pits 18x18x12 ins N & S of cor 5½ ft. dist and raised a mound of earth 1½ ft high 3½ ft base around post.*

► 2011:

Point for the 1/4 cor. of secs. 8 and 9, at proportionate dist.; there is no remaining evidence of the original cor.

Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground with brass cap mkd.

T 18 S R 28 E
1/4
S 8 | S 9
2010

from which

A juniper, 11 ins. diam., bears S. 69° W., 99.5 ft. dist., mkd. 1/4 S8 BT.

A juniper, 21 ins. diam., bears N. 3° W., 244.1 ft. dist., mkd. X BT.


RESTORATION BY, STAMP AND DATE:

Michael C. Springer, PLS
Grant County Surveyor

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

AUG 22 2011

BY:

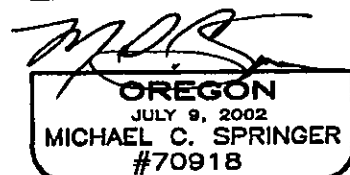

EXPIRES: 6/30/2012

August 19, 2010

EVIDENCE FOUND: None. No field visit was made for this Corner Restoration Report, it is prepared from record information. See Record Map of Survey No. 1932 filed in the office of the Grant County Surveyor.