

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

None previously established.
See Record Map of Survey No. 2026


DIAGRAM
S25
C-N-NW
1/64
PLS 2645
2014

Description of corner evidence found:

Not Applicable

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a mound of stone. A magnet in a clear plastic case was deposited at the base of pipe. Cap is 4" above the mound of stone.

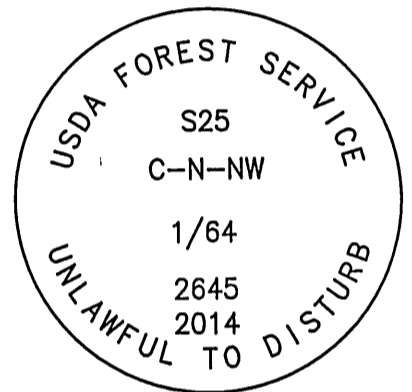

New accessories:

A 5/8" x 30" rebar with red plastic cap stamped "Umatilla NF" bears S19°E, 16.15'
A 5/8" x 30" rebar with red plastic cap stamped "Umatilla NF" bears N88°E, 15.0'.

Geodetic Coordinates (NAD83):

N 44°51'02.5"
W 119°34'06.3"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver.

Date: July 15, 2014

Declination: 15° E

Witnesses: Carl Stout, Robert Flora, Paul Guglielmelli and Lucas Beauchamp

REGISTERED
PROFESSIONAL
LAND SURVEYOR
Mark A. Lichtenthaler
OREGON
JANUARY 18, 1994
MARK A. LICHTENTHALER
2645

EXPIRES 12-31-2018