


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

None previously established.
See Record Map of Survey No. 2026

U-21

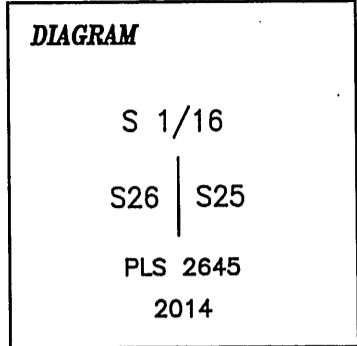


Description of corner evidence found:

Not Applicable

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a 2' x 1' mound of stone. A magnet in a clear plastic case was deposited at the base of pipe. Cap is 3 1/2" above the mound of stone.

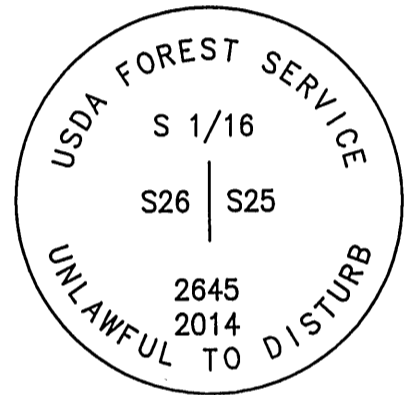

New accessories:

A 6" Double bole Juniper scribed "X BT" with a aluminum tag marked "2645" bears N85°30'W, 24.39'.
A 5/8" x 30' rebar with a red plastic cap marked "Umatilla NF" bears S10°W, 40.11'.

Geodetic Coordinates (NAD83):

N 44°50'29.5"
W 119°34'22.1"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver.

Date: July 16, 2014

Declination: 15° E

Witnesses: Carl Stout, Robert Flora, Paul Guglielmelli and Lucas Beauchamp

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JANUARY 18, 1994
MARK A. LICHTENTHALER
2645

EXPIRES 12-31-2018