


RECORD OF LAND CORNER MONUMENTATION

CORNER: N1/4 Cor. Sec. 17, Twp.9S., R.26E., W.M.

ORIGINAL SURVEY BY: Aaron F. York, U.S. Deputy Surveyor

CONTRACT NUMBER: 335

CONTRACT DATE: August 11, 1879



ORIGINAL G.L.O. DESCRIPTION: Set stone 10X10X6 for 1/4 Sec. Cor. Stone mound at Cor.....45.60 a deep Ravine S.W. (Note: record distance between set stone at corner and ravine is 363 feet)

EVIDENCE FOUND: After a diligent search, I was unable to find the original marked stone. However, there is a North-South fence that terminates at the top of a 10 ft. tall vertical rock bluff. When compared to other retraced measurements in this township, the location of the end of the fence fits reasonably well with the found Section Corner located a half mile East. It also fits harmoniously with the GLO record topo call to a deep ravine 363 feet West. I determine that the end of the fence is the best representation of the original position of this corner.

DESCRIPTION OF MONUMENT AND ACCESSORIES SET:

At the corner point, I set a 5/8" x 15" iron rod, driven to bedrock, with attached 2" aluminum cap marked as shown below. I built a 2 ft. mound of stone around the new monument.


FROM WHICH, I set the following reference points:

A 5/8"x15" iron pin, driven to bedrock, bears N.49°07'E., 11.67 ft., with attached yellow plastic cap marked BENCHMARK SURVEYING

A 5/8"x15" iron pin, driven to bedrock, bears S.40°35'E., 10.66 ft., with attached yellow plastic cap marked BENCHMARK SURVEYING

A 5/8"x15" iron pin, driven to bedrock, bears N.78°24'W., 13.26 ft., with attached yellow plastic cap marked BENCHMARK SURVEYING.

A 5/8"x15" iron pin, driven to bedrock, bears N.18°29'W., 13.83 ft., with attached yellow plastic cap marked BENCHMARK SURVEYING

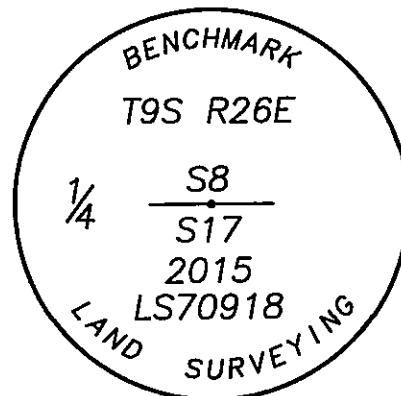

No reference point was set in the Southeast quadrant as the point would have been over the bluff. Bearings shown hereon to reference points are based on Record Map of Survey No. 2027.

RESTORATION BY:

Michael C. Springer, PLS
Benchmark Land Surveying
217 N. Canyon Blvd.
John Day, OR 97845


April 18, 2015

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

APR 24 2015

BY: 

REGISTERED
PROFESSIONAL
LAND SURVEYOR


OREGON
JULY 9, 2002
MICHAEL C. SPRINGER
#70918

EXPIRES: 6/30/2016