

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
New Corner

*

DIAGRAM
T9S R32E
C1/4
+
S32

Description of corner evidence found:

Description of monument and accessories I establish to perpetuate the original location of this corner:

Set a 2 1/2 x 28" aluminum monument 18" in the ground in a mound of stone.

T9S R32E
C1/4
+
S32
PLS1918
1988

I establish new bearing trees:


A 9" P.Pine bears S 1° E, 33.2 ft, scribed C1/4S32BT.

A 12" P.Pine bears N 20 1/2° E, 30.5 ft, scribed C1/4S32BT.

New BTs have 3/4" brass washers marked PLS1918 attached to the BT blaze, faces and bands painted with red tree marking paint, and BT tags and Attention or Land Survey Monument signs. A steel fence post with Attention or Land Survey Monument sign is driven approximately 3-5 feet from the corner.

Sun Cadastral Survey, Cont No. 53-04H1-7-4011
Field Book: 4-46
Work accomplished: 9/14/88
Witnesses: Tyler Parsons, Louise Parsons
Job No.: 87221

PARSONS SURVEYING
1915 S.E. Stone Street
Corvallis, OR 97333
(503) 752-7515

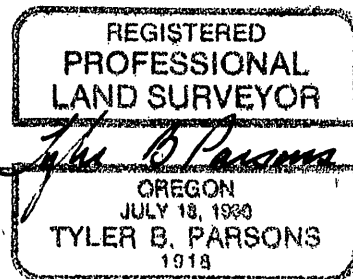

Office of COUNTY SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 2nd day of Feb, 1989

Robert D. Beget by _____
(COUNTY OFFICIAL) (DEPUTY)